



**Centrifugal | Electric**

- Flow rates to 35 gpm (132 lpm)
- 39" (1000mm) or 47" (1200mm) lengths
- 110v or 230v Variable Speed



**Centrifugal | Air**

- Flow rates to 28 gpm (106 lpm)
- 39" (1000mm) or 47" (1200mm) lengths
- ½ and ¾, hp Motors



**Metering Systems**

- Accuracy Within 0.3% of Reading
- Electric or Air Motor
- PLC Interface Capabilities



**Progressive Cavity | Electric**

- Flow Rates to 12 gpm (45 lpm)
- Maximum Viscosity 100,000cps (mPAS)
- Available with ¾, 1 and 1½ hp Motors



**Progressive Cavity | Air**

- Flow Rates to 12 gpm (45 lpm)
- Maximum Viscosity 100,000cps (mPAS)
- Available with 2, 4 and 5 hp Motors



**Pump Lift**

- Lightweight & Portable
- Designed for Drums & Tanks
- Rechargeable Battery Pack



**StandardPump.com**

1610 Satellite Blvd. Suite D., Duluth, GA 30097 USA  
Ph 770-307-1003 | info@standardpump.com



**5 DAY**  
**LEAD TIME**

SP-SANI-PRE-1117




**3A Certified | Ball Check**

- Available in 1½", 2" and 3" Sizes
- Flow rates to 150 gpm (568 lpm)
- Pump Rotates 360° for Cleaning



**Sanitary | Ball Check**

- Available in 1½", 2" and 3" Sizes
- Flow rates to 150 gpm (568 lpm)
- Oil-Free/Non-Sticking Air Valve

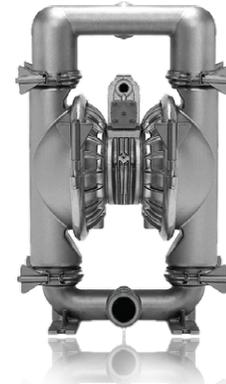

**FDA Compliant | Ball Check**

- Available in ½", 1", 1½", 2" and 3" Sizes
- Flow rates to 234 gpm (886 lpm)
- FDA Compliant Materials (CFR Title 21)



**Sanitary | Flap Check**

- Max. Solid Size is 2½" (63,5mm)
- SS316 / 32 Ra Surface Finish
- Pumps Rotates 360° for Cleaning



**Poultry Pump | Flap Check**

- Ideal for Transferring Livers, Necks, Hearts and Gizzards
- Clean in Place Design (CIP)
- Oil-Free/Non-Sticking Air Valve



**5 DAY**  
LEAD TIME

