

Alfa Laval GJ BB

Rotary jet heads

Introduction

The Alfa Laval GJ BB is a rotary jet head tank cleaning machine for use as a portable tank cleaning machine in both industrial and hygienic applications. Built to clean barrels and drums in two to three minutes using as little as 8-12 US gallons of water, it combines pressure and flow to create high-impact cleaning jets that rotate in a repeatable and reliable 360-degree cleaning pattern.

The GJ BB minimizes the consumption of water and cleaning media. The gear train, which uses food-grade lubricant, reduces the risk of particle damage to the machine during operation. Easy to customize to meet customer requirements, it allows companies to spend less time on their barrels and drums and more time producing.

Applications

The Alfa Laval GJ BB is designed for the removal of the toughest residues in drums and barrels across a broad range of industries in both industrial and hygienic applications.

Benefits

- · Fast cleaning time in two to three minutes
- High-impact cleaning in a 360° repeatable cleaning pattern
- Slim design makes it possible to insert through small tank inlet openings
- Light weight, easy to handle

Standard design

The choice of nozzle diameters can optimize jet impact length and flow rate at the desired pressure.

Working principle


The high-impact jet stream from the Alfa Laval GJ BB rotary jet head covers the entire surface of the interior of the barrel or drum. This achieves a powerful mechanical impact with a low volume of water and cleaning media.

The flow of the cleaning fluid makes the nozzles perform a geared rotation around the vertical and horizontal axes. In the first cycle, the nozzles lay out a course pattern on the tank surface. The subsequent cycles gradually make the pattern denser until at full cleaning pattern is reached. Once the full



cleaning pattern is reached, the machine will start over again and continue to perform the next full cleaning pattern.

Cleaning Pattern

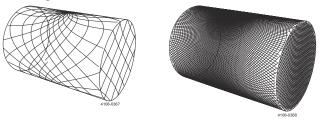

First Cycle

Full Pattern

The above drawings show the cleaning pattern achieved on a cylindrical horizontal vessel. The difference between the first cycle and the full pattern represents the number of additional cycles available to increase the density of the cleaning.

TECHNICAL DATA

Lubricant:	Food grade	
Max. throw length:	8 ft	

Pressure	
Working pressure:	80 - 1,200 PSI
Recommended pressure:	80 - 800 PSI


PHYSICAL DATA

Materials			
Materials:	1.4404 (316L), PPS, PFTE, EPDM		
Temperature			
Max. working temperature:	203 °F		
Max. ambient temperature:	284 °F		
Weight			
Weight:	5.5 lbs		
Connections			
Standard thread:	3/8" NPT		
Available option:	34" NPT, 34" BSP		

Concept


Avoid hydraulic shock, hard and abrasive particles in the cleaning liquid, as this can cause increased wear and/or damage of internal mechanisms. In general, a filter in the supply line is recommended. Do not use for gas evacuation or air dispersion. For steaming we refer to the manual.

Cleaning time

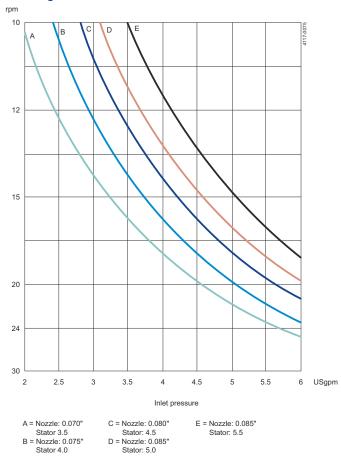

Flow Rate




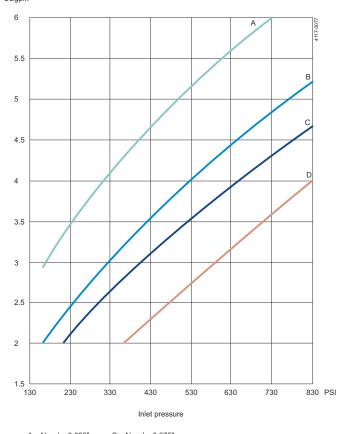

A = Nozzle: 0.085" Stator: 5.0 & 5.5 B = Nozzle: 0.080" Stator 4.5


C = Nozzle: 0.075" Stator: 4.0 D = Nozzle: 0.070" Stator 3.5

Impact Throw Length

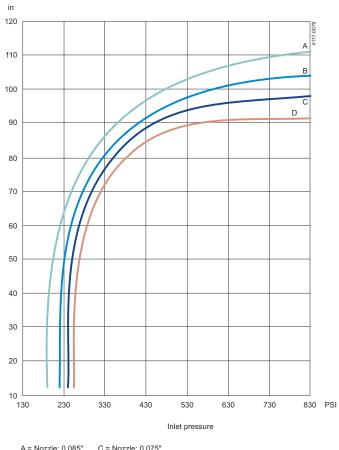

A = Nozzle: 0.085"	C = Nozzle: 0.075"
Stator: 5.0 & 5.5	Stator: 4.0
B = Nozzle: 0.080"	D = Nozzle: 0.070"
Stator 4.5	Stator 3.5

Dimensions (inch)

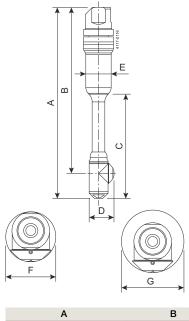

А	В	С	D	E	F	G
12.79	11.1	6.99	1.66	1.7	1.67	2.05

This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200006877-1-EN-US

How to contact Alfa Laval

© Alfa Laval Corporate AB

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com