

Low Flow M-70 Series Water Saver Spray Nozzle

As with the Standard M-70 Spray Nozzle, many of our customers consider the Low Flow M-70 to be truly the best on the market. By purchasing an M-70 Low Flow, you will benefit from reduced water consumption rates and still get the same modern and innovative engineering principals and premium quality parts found in all our products.

We offer nozzles built strong to hold up to the most rugged operating conditions and provide the day to day dependability you've come to know from Strahman Valves.



Specifications

- ◆ **Maximum working pressure:** 150 psi (10 BAR)
- ◆ **Maximum recommended operating temperature:** 200°F/93°C
- ◆ Standard: Bronze construction
Available: S-70 series, all stainless steel
- ◆ Available: black, white and red
- ◆ Long handle design grip for whole hand placement
- ◆ Replaceable (heavy duty) renewable rubber cover
- ◆ Stainless steel seat design prevents nozzle seat leakage
- ◆ Instant water shut-off when trigger is released
- ◆ Available: ½", ⅝", ¾" ID hose barb, or ¾" GHT swivel adapter with locking ring

NOTE: Not suitable for steam service; 1-year limited warranty

Please see reverse side for parts listing and flow rates.

Shown: Red M-70 (black cover),
M-75 (white cover), M-77 (red cover)



USA Headquarters

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

www.strahmanvalves.com

RODEM[®]

PROCESS EQUIPMENT

www.rodem.com 800-543-7312

France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

Germany

Kirchstrasse 16, D-77855, Achern, Germany

Tel: 49 (0) 7841-6846530


Fax: 49 (0) 7841-6846531



ISO 9001
QMI-SAI Global

Last Updated: July, 2012

Low Flow M-70 Series Water Saver Spray Nozzle

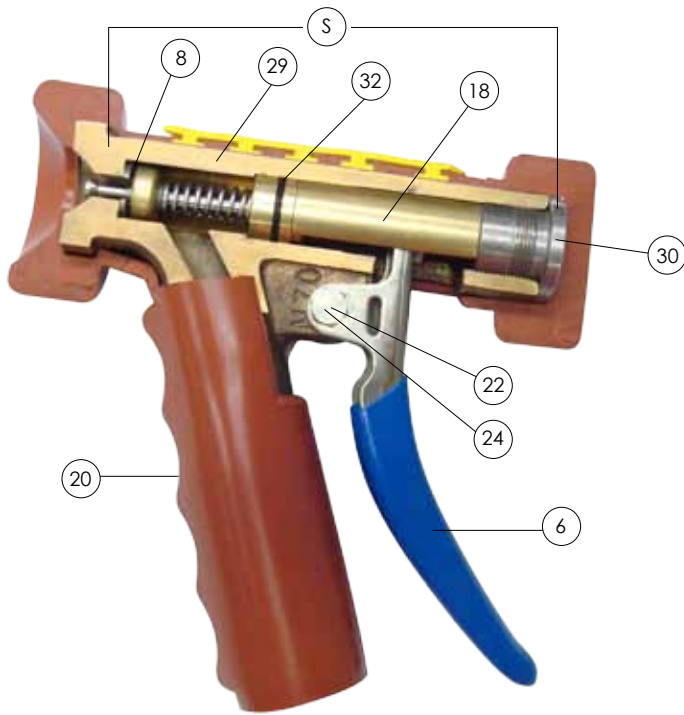

PARTS	
PART NO.	DESCRIPTION
6	LEVER ARM
8	SEAT
18	CAGE
20	RENEWABLE RUBBER COVER (Black, White or Red)
22	LEVER ARM BRUSHING
24	LEVER ARM SCREW
28	LOCK RINGS
29	BODY
30	LOCK SCREW
32	BODY SEALING O-RING
S	S CARTRIDGE

M-70 FLOW TEST		
	STANDARD	LOW FLOW
PSI	FLOW (gpm)	
20	3 ¼	2 ¼
30	4 ¼	2 ¾
40	5 ⅛	3 ¼
50	5 ⅞	3 ¾
60	6 ¾	4 ⅛
70	7 ½	4 ½
80	7 ¾	4 ⅞
90	8 ¼	5
100	9	5 ⅛